




ProScan PLT7223G Speakers Replacement

Replace your malfunctioning speakers to restore sound to your ProScan.

Written By: Laura Kneeshaw

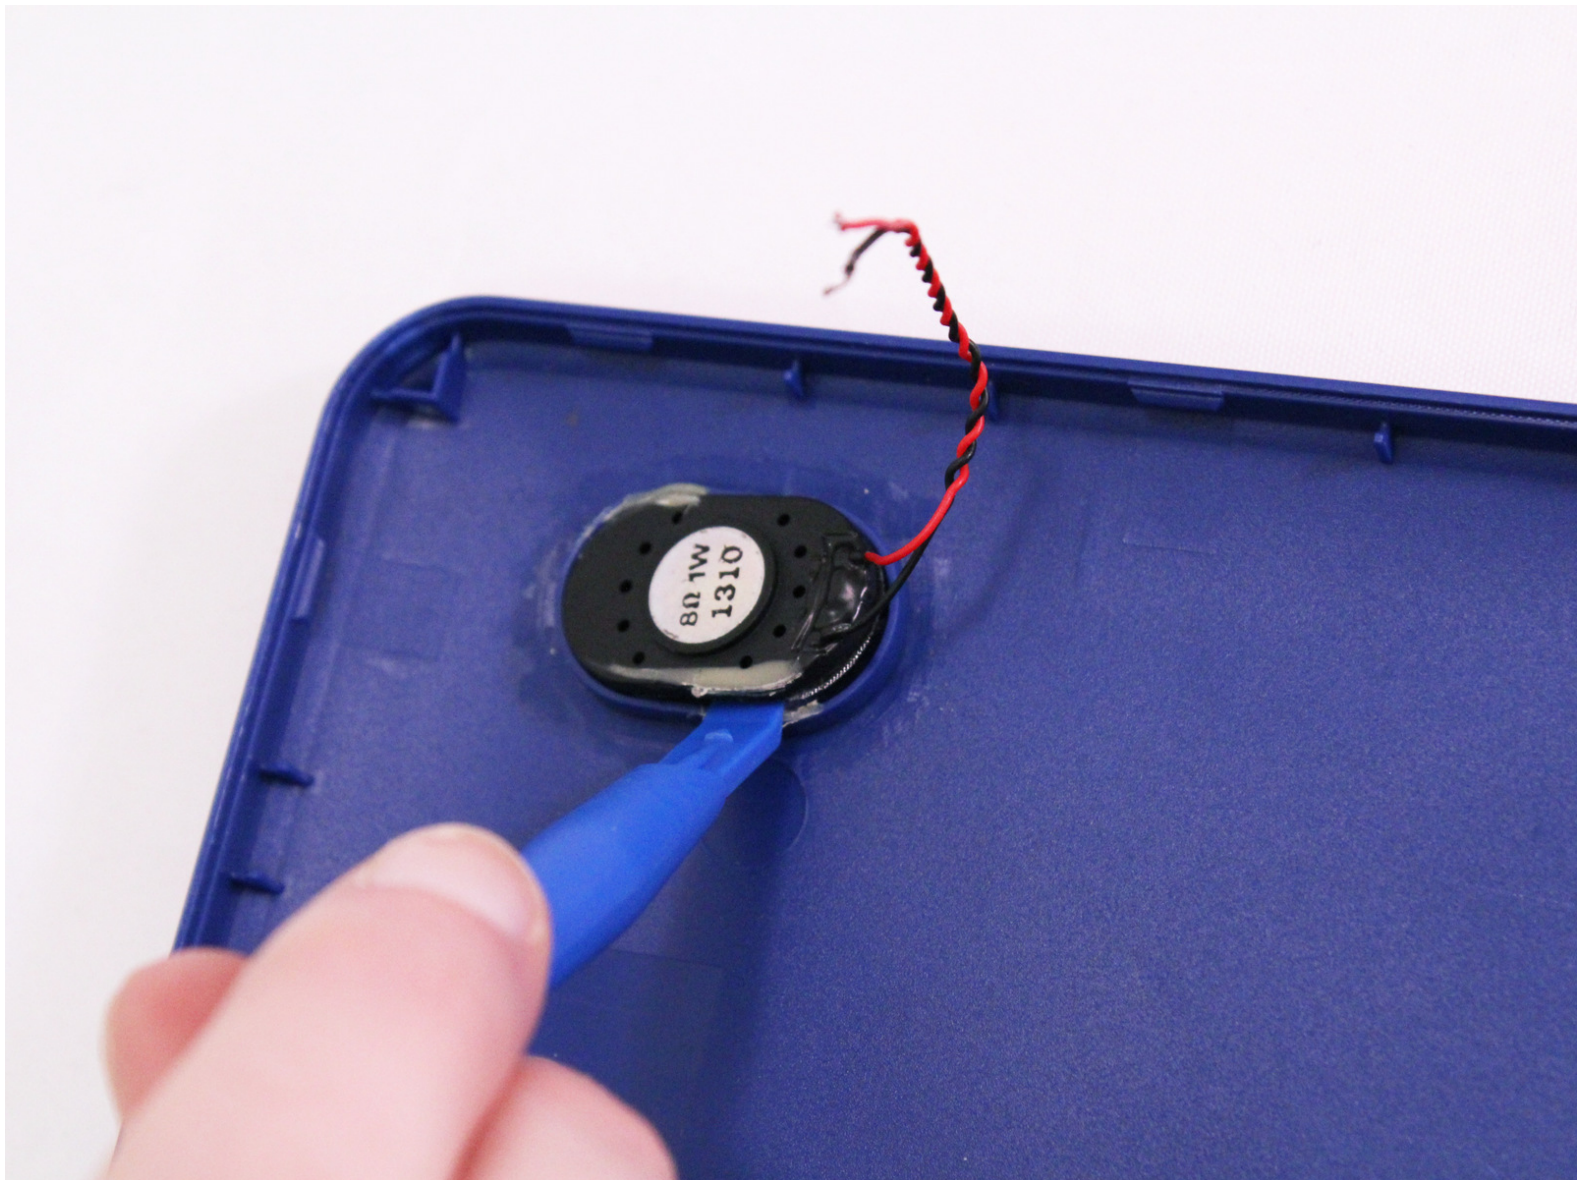

INTRODUCTION

If your ProScan's audio is not working, use this guide to replace the speakers. This guide will require soldering.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Soldering Station](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Speakers




- Remove both 4 mm screws on the top of the tablet with a PH00 screw driver.

Step 2

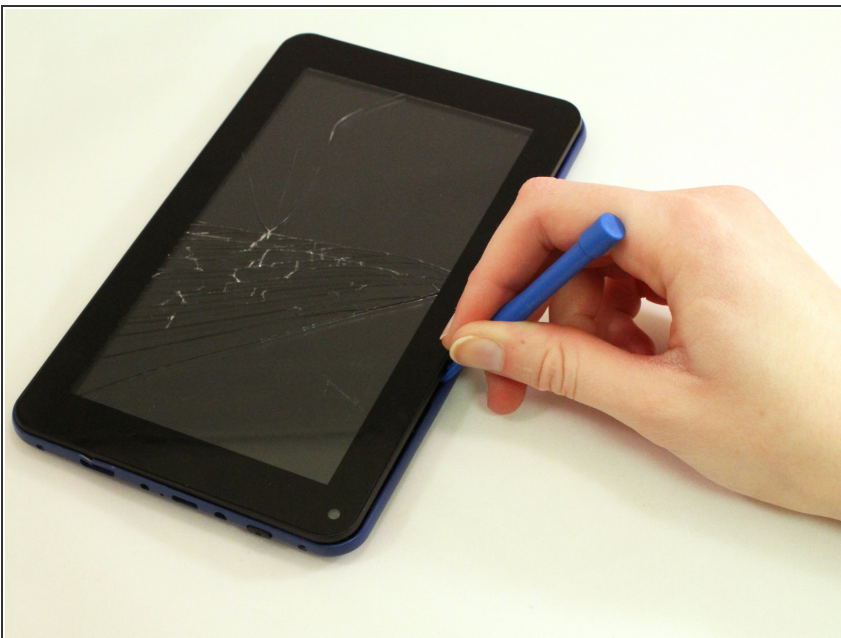


- Use the blue plastic opening tool to pry open the tablet.
- i* You will hear popping sounds. That's okay.
- !** Be careful when using the blue plastic opening tool on the side of the device near the speakers, as there is a wire here that connects the speakers to the motherboard.

Step 3

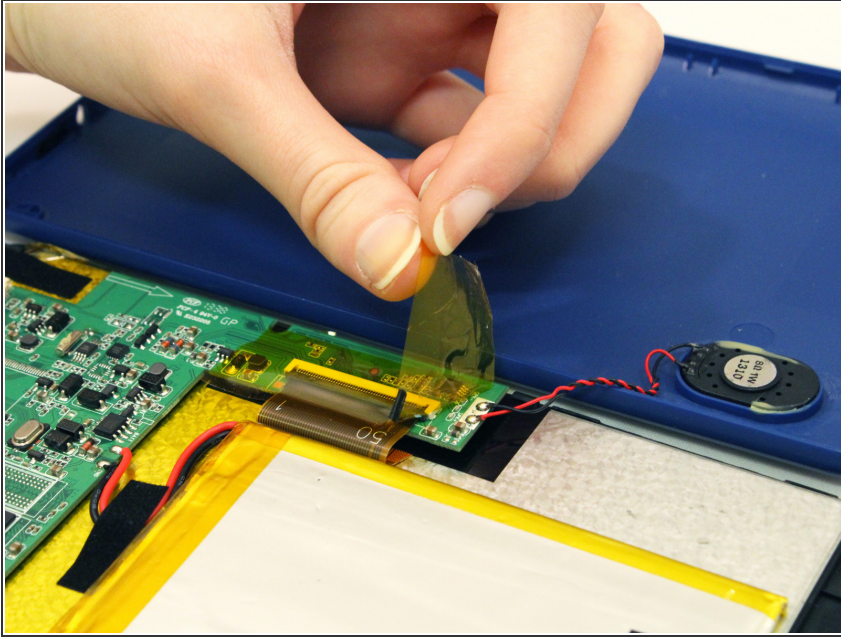


- Pull back the protective tape from the two wires that connect the speakers to the motherboard.

Step 4

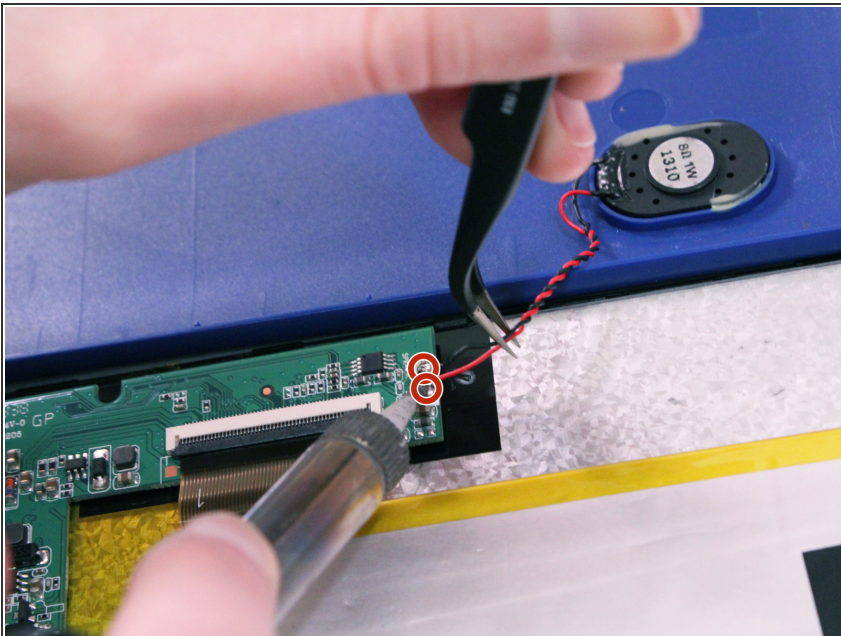

- Use the soldering tool to remove speaker wires from motherboard.
- ⚠ Soldering tool will get hot, handle with care.

Step 5

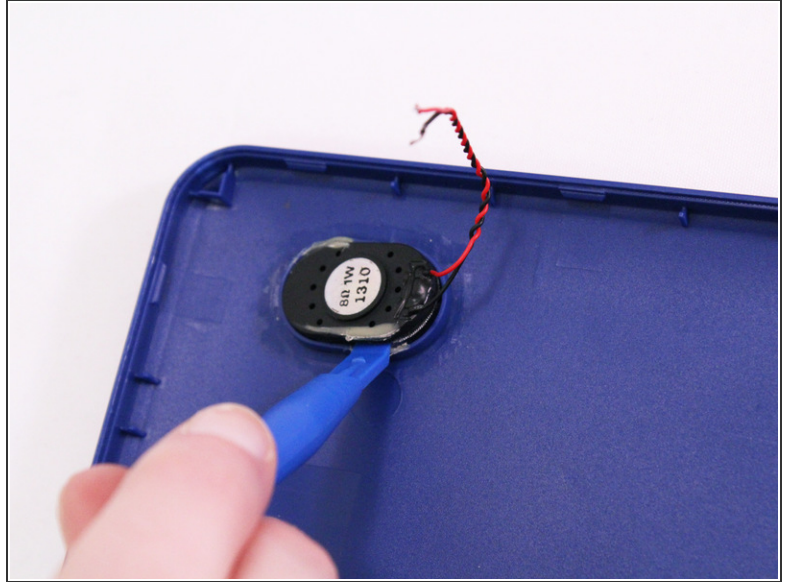

- If needed use a plastic opening tool to remove speaker from the speaker port on the tablet.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-25 01:13:26 PM.